

# Water Hose Reels

- **Suitable for damp or wet environments**
- **Compatible with water-based fluids, such as acetylene glycol**
- **Strong and durable**



CEJN water hose reels are ideal for wash-down applications, fluid-filling stations, and personnel rinse areas. They are also an excellent choice for compressed air in damp and wet environments. When used exclusively for water, the green color of the hose makes it distinguishable from CEJN compressed air hose reels. A feeder hose is included.

*Hose reels for compressed air applications and cable reels for electrical applications are also available.*



**TECHNICAL DATA** **WATER FLOW**

**Feeder hose length** ..... 2 m (6.6 ft)  
**Hose material** ..... Braided PUR  
**Connections** ..... Male thread  
**Temperature range** ..... 5°C – +60°C (41°F – +140°F)

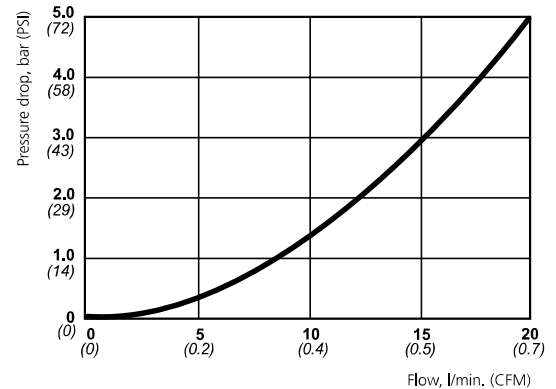

		Part No.	ID x OD	Connection	Reel diameter	Weight	Max working pressure (20°C, 68°F)
<b>WATER</b>	14 meter	19 911 5140	9,5 x 13,5	R 1/4"	430 mm	6,3 kg	9 bar (130 PSI)
		19 911 5141	9,5 x 13,5	NPT 1/4"	430 mm	6,3 kg	9 bar (130 PSI)

# Electrical – Cable Reels

- **Sturdy housing protects enclosed cable and reel mechanism**
- **Strong and durable**
- **Flexible high quality rubber cable**


CEJN electrical cable reels feature a high quality rubber cable and are supplied with a thermal overload protection circuit, which cuts off the electrical supply in the event of a power surge. The Quick-Lock feature on the mounting bracket makes installation and service quick and easy. The reels can be ceiling- or wall-mounted and swivel 300°.

*Hose reels for compressed air and water applications are also available.*



**TECHNICAL DATA**

**Material cable** ..... Rubber H07RN-F  
**Cable dimension** ..... 3 x 1.5 mm  
**Voltage** ..... 230 V  
**Protection class** ..... IP 23  
**Temperature range** ..... 5°C – +60°C (41°F – +140°F)



		Part No.	Connection	Reel diameter	Weight	Power output fully unwound	Power output fully wound	Current
<b>SMALL REEL</b>	10 meter	19 911 5050	Schuko plug	330 mm	4,6 kg	3500 W	1500 W	16 A
		19 911 5052	CH plug	330 mm	4,6 kg	2300 W	1500 W	10 A
<b>LARGE REEL</b>	17 meter	19 911 5150	Schuko plug	430 mm	6,7 kg	3500 W	1000 W	16 A
		19 911 5152	CH plug	430 mm	6,7 kg	2300 W	1000 W	10 A