

# Compressed Air Hose Reels

- High flow capacity
- Low pressure drop
- Strong and durable



CEJN Hose Reels for compressed air feature high-quality, oil-resistant polyurethane hose. The feeder hose connection, axle and swivel design ensures a high flow rate and low pressure drop, securing top performance. The reel and spring assembly is tested to endure hours of hard use. The reels can swivel 300° making it possible for the operator to move around freely and the low pulling force makes it easy for anyone to handle. The impact resistant casing protects the hose and reel mechanism from dirt and debris. The Quick-Locks on the mounting bracket makes installation and service quick and easy. The Hose Reels are available in several casing sizes and hose dimensions, as well as with CEJN braided anti-spark hose. All hose reels are supplied with a feeder hose.


Hose reels for water applications and cable reels for electrical applications are also available.

## TECHNICAL DATA

## AIR FLOW

Feeder hose length ..... 2 m (6.6 ft)  
 Hose material ..... Braided PUR  
 Connections ..... Male thread  
 Temperature range ..... -20°C – +60°C (-4°F – +140°F)

- 19 911 501X
- 19 911 510X
- 19 911 10X0
- 19 911 512X
- 19 911 502X
- 19 911 513X

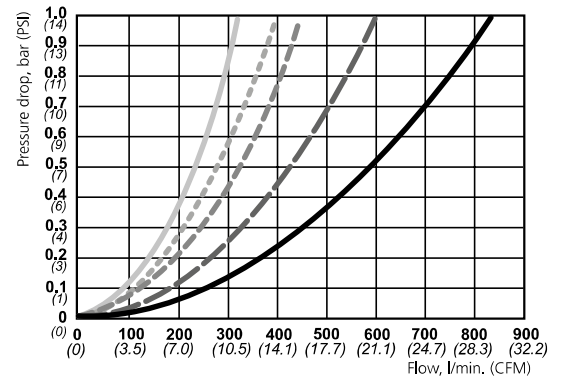

CE Marked in compliance with  
2006/42/EC

		Part No.	ID x OD	Connection	Reel diameter	Weight	Max. working pressure (20°C, 68°F)
<b>SMALL REEL</b>	7 meters	19 911 5020	8 x 12	R 1/4"	330 mm	3.9 kg	16 bar (232 PSI)
		19 911 5021	8 x 12	NPT 1/4"	330 mm	3.9 kg	16 bar (232 PSI)
	9 meters	19 911 5010	6.5 x 10	R 1/4"	330 mm	3.9 kg	16 bar (232 PSI)
		19 911 5011	6.5 x 10	NPT 1/4"	330 mm	3.9 kg	16 bar (232 PSI)
<b>MEDIUM REEL</b>	10 meters	19 911 1000	8 x 12	R 1/4"	390 mm	5.5 kg	16 bar (232 PSI)
		19 911 1050	8 x 12	NPT 1/4"	390 mm	5.5 kg	16 bar (232 PSI)
<b>LARGE REEL</b>	10 meter	19 911 5130	11 x 16	R 1/2"	430 mm	6.6 kg	12 bar (174 PSI)
		19 911 5131	11 x 16	NPT 1/2"	430 mm	6.6 kg	12 bar (174 PSI)
	14 meters	19 911 5120	9.5 x 13.5	R 1/4"	430 mm	6.3 kg	12 bar (174 PSI)
		19 911 5121	9.5 x 13.5	NPT 1/4"	430 mm	6.3 kg	12 bar (174 PSI)
	16 meters	19 911 5100	8 x 12	R 1/4"	430 mm	6.3 kg	12 bar (174 PSI)
		19 911 5101	8 x 12	NPT 1/4"	430 mm	6.3 kg	12 bar (174 PSI)
<b>LARGE REEL WITH ANTI-SPARK HOSE</b>	14 meters	19 911 5125	9.5 x 13.5	R 1/4"	430 mm	6.3 kg	12 bar (174 PSI)
		19 911 5126	9.5 x 13.5	NPT 1/4"	430 mm	6.3 kg	12 bar (174 PSI)